

KAFFEEWERK

KAFFEEWERK Großverkauf & Service
Im Gläserneck 1 | 58169 Kerpen-Horrem
Tel. 0 22 73 / 40 13 | Fax 0 22 73 / 40 15

Niederlassung Düsseldorf
Erlanger Straße 20 | 40233 Düsseldorf
Tel. 02 11 / 964 63 52 | Fax 02 11 / 779 45 64
info@kaffeewerk.de | www.kaffeewerk.de



— QUICK SPECIFICATION SHEET —

ELECTRIC MAINS

MIRAGE DUETTE			
Version	standard	high power	
Tension	220-240VAC		
Frequency	50 or 60 Hz		
# phases	1	3	1
Peak power	3600W	5200W	5200W
Peak current/phase	16A	7+7+10A	23A

MIRAGE TRIPLETTE		
Version	standard	
Tension	220-240VAC	
Frequency	50 or 60 Hz	
# phases	3	1
Peak power	6400W	6400W
Peak current/phase	9+9+11A	28A

DIMENSIONS

Approximate dimensions and footprints of the Mirages are shown in the illustrations. The black circles are the rubber feet.

The optimal countertop feedthrough of 60mm (2.4") is within the grey square.


Note that the steam wands will protrude a few centimeters on the left and right side.

WEIGHT

The countertop should provide a solid base to carry the full weight of the machine: roughly 75kg for the Duette and 95kg for the Triplette.

NOTES

Water supply from a water treatment system should be within 1.5m (5ft) of the machine. The water supply hose that comes with the machine has a half ball at the end of the 3/8" nut connector. Discharge should not be further away than 1.5m, have an internal diameter of at least 32mm (1" 3/8) and should be fitted with a trap. There must be space nearby to locate the water pump with its electrical motor.

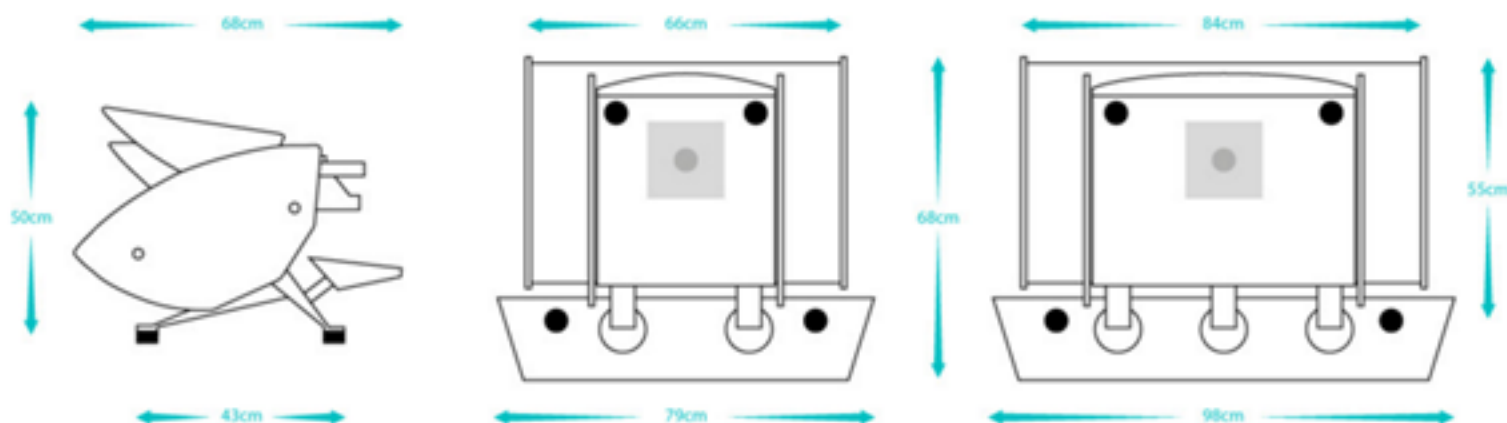

SHIPPING CRATES

Download an overview of the shipping crate dimensions and weight by clicking [here..](#)